


J I H G F E D C B A

ERP CODE: _____

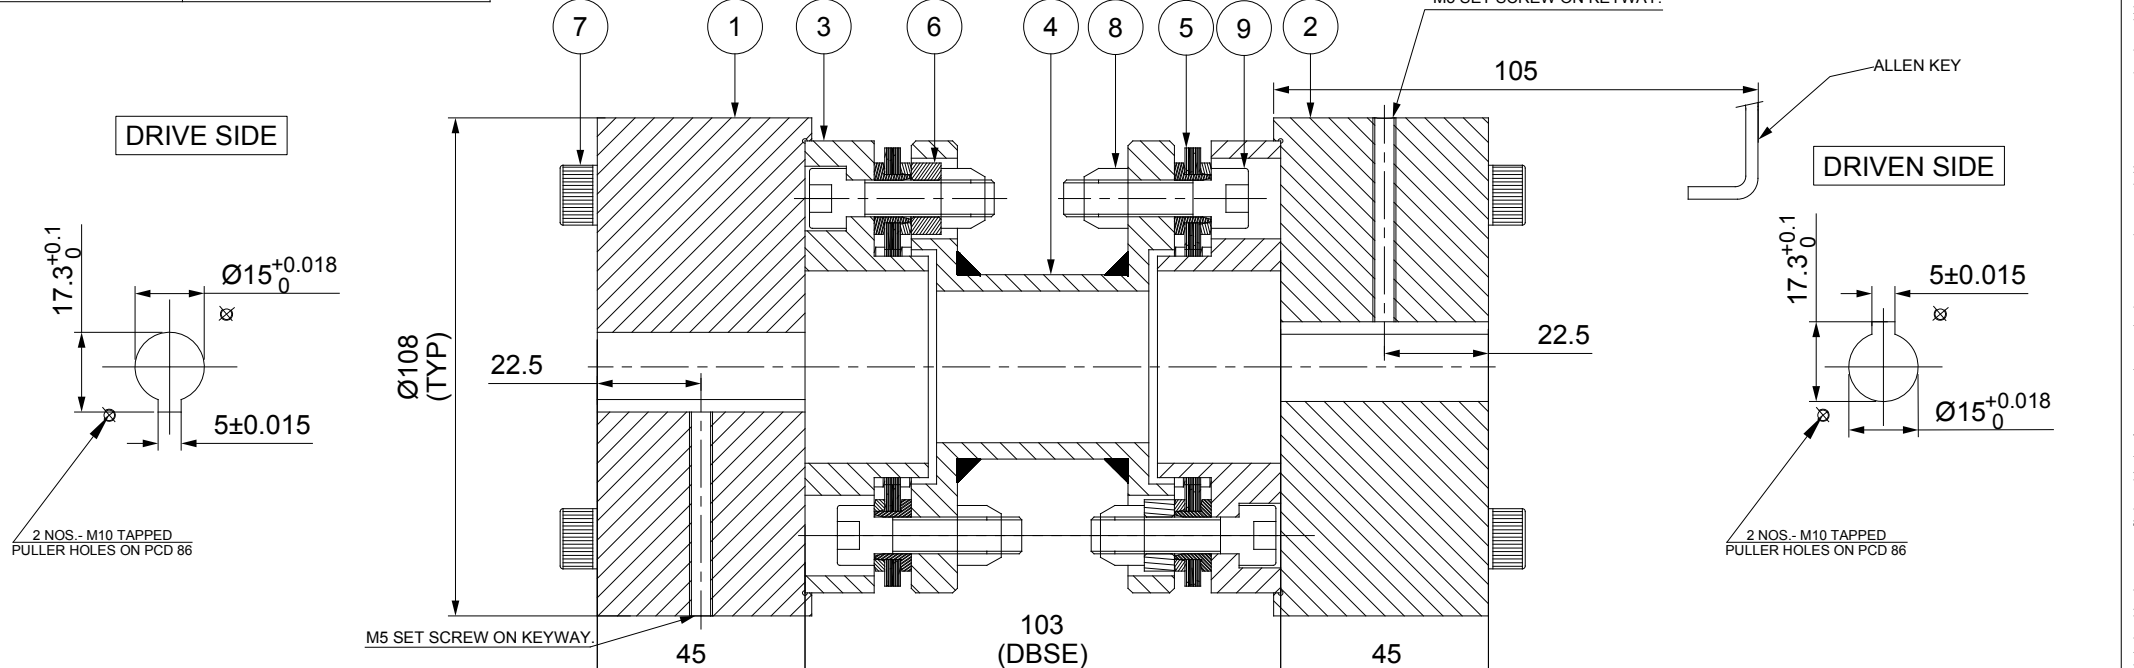

APPLICATION DETAILS	
APPLICATION	-
RATED POWER	-
RATED SPEED	-
RATED TORQUE	-
A.S.F.	-
COUPLING SPECIFICATIONS	
COUPLING RATING	6.5 KW @ 100 RPM
RATED TORQUE	618 Nm
MAX. BORE	72 mm
WEIGHT (Approx.)	9.166 kg
INERTIA (WK ²)	0.013 kg.M ²
TORSIONAL STIFFNESS	0.100 MNm/rad
CPLG DYNAMIC BALANCED TO GR 6.3 AS PER ISO 1940- 1	
MAX. MISALIGNMENT	
AXIAL DEFLECTION	± 1 mm
ANGULAR DEFLECTION	0.75°
RADIAL MISALIGNMENT	0.013mm

TIGHTENING TORQUE :-
 1) SR.NO.9 COUPLING BOLT = 29 Nm
 2) SR.NO.7 ATTACHMENT BOLT = 29 Nm

REV	DMRN NO.	DESCRIPTION	REV. BY	APPD. BY	DATE

SR.NO.	DESCRIPTION	MATERIAL	QTY.
9	COUPLING BOLT	HTS GR. 12.9	12
8	CLEVELOCK NUT	GR. 10	12
7	ATTACHMENT BOLT	HTS GR. 12.9	12
6	S SLEEVE	ASTM A 1040	6
5	ELEMENT BLADE ASSEMBLY	SS 301	2
4	SPACER	ASTM A 1040 / ASTM A36, 106B	1
3	ADAPTER III/II	ASTM A 1040	2
2	DRIVEN HUB (II)	ASTM A 1040	1
1	DRIVE HUB (II)	ASTM A 1040	1

TITLE: REM-65(103) III/II /---- CPLG	MATERIAL: REFER TABLE	AUTHORITY	INITIALS	SIGN	DATE
CUSTOMER NAME:		DRAWN	-	-	-
		CHECKED	-	-	-
		APPROVED	-	-	-
		SCALE: 1:1	REF. NO.		
		ANG. OF PROJ.			
		RATHI TRANSPower PVT LTD PUNE-411014			DRG.NO.:
					XXXX

This drawing/ information/ design is the property of Rathi Transpower Pvt. Ltd. It is confidential & must not be made public or copied without prior written authorization & is subjected to recall at any time. Acceptance of this drawing constitutes full arrangements with these conditions.