




IF IN DOUBT, PLEASE ASK

DO NOT SCALE ALL DIMENSIONS ARE IN mm

J I H G F E D C B A

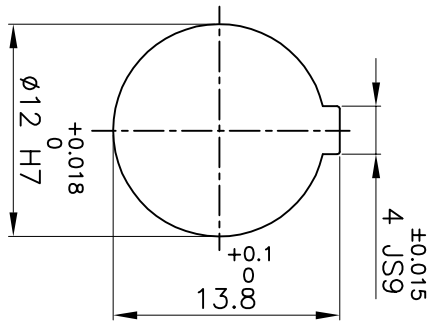

DRIVE SIDE

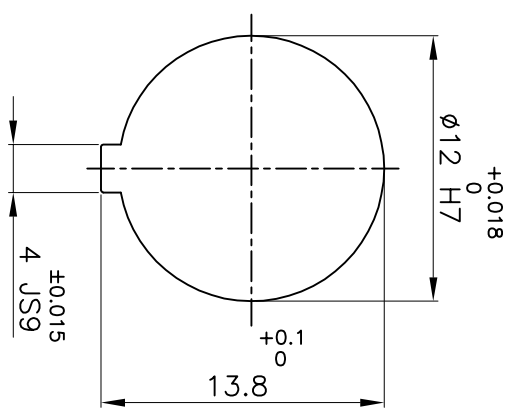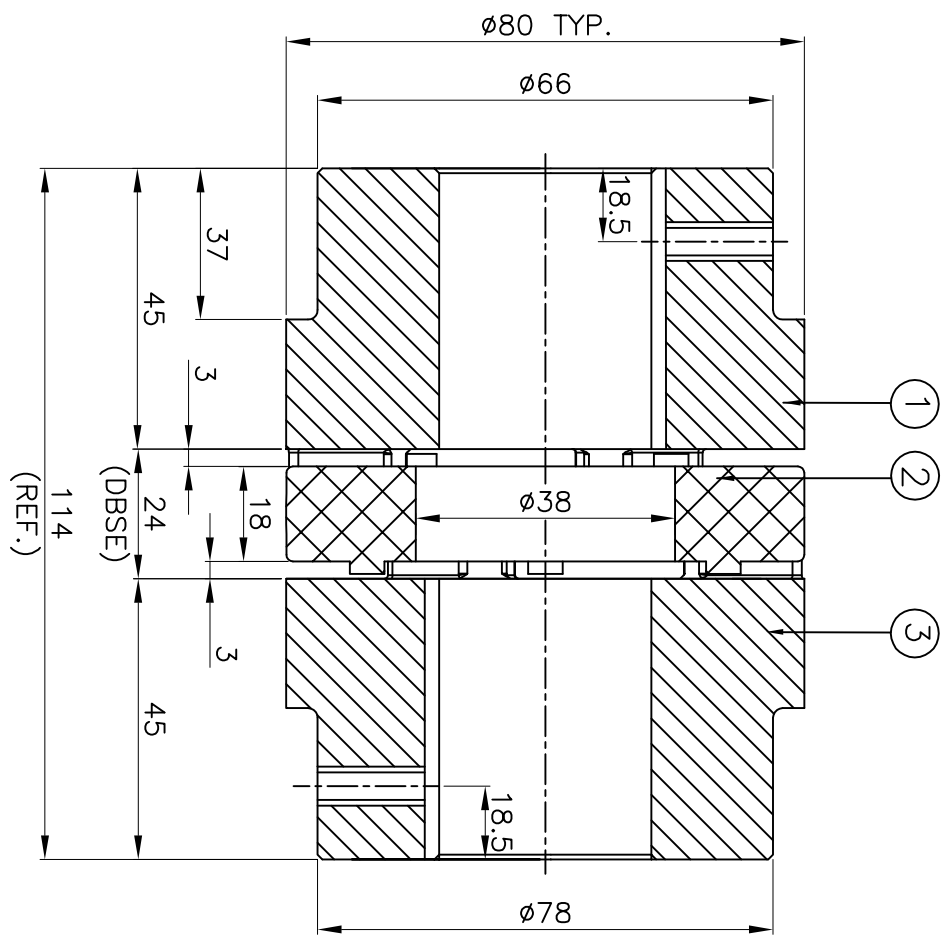

DRIVEN SIDE

APPLICATION DETAILS

APPLICATION	-
RATED POWER	- KW
RATED SPEED	- RPM
RATED TORQUE	- Nm
A.S.F.	-

COUPLING CAPACITY

COUPLING RATING	4.21KW AT 100RPM.
RATED TORQUE	402KNm
MAX. BORE TYPE-I & II	40 & 48mm
WEIGHT (APPROX)	2.4kg
INERTIA (WK ²)	2.45X10 ⁻³ kg-m ²

MAX. MISALIGNMENT

AXIAL	±2.2mm
ANGULAR	0.90°
PARALLEL	0.25mm

S/N	SR NO	DESCRIPTION	MATERIAL	QTY.
3	HUB-I	C.I IS:210		1
2	SPIDER	POLYURETHANE (LIGHT WORY)		1
1	HUB-I	C.I IS:210		1

TITLE: **RRJ-38 I/II /-----**
 CPLG.
 MATERIAL: **REFER TABLE**
 CUSTOMER NAME: _____
 AUTHORITY INITIALS: _____
 DRAWN: _____
 CHECKED: _____
 APPROVED: _____
 SCALE: N/S/REF. No.: _____
 DATE: _____

REV. / DMRN NO. DESCRIPTION REV. BY APPD. BY DATE
 RATHI RATHI TRANSPOWER PVT LTD PUNE 411006
 DRG No.: _____
 3 EN-F-112