


IF IN DOUBT, PLEASE ASK

DO NOT SCALE ALL DIMENSIONS ARE IN mm



J I H G F E D C B A

8
7
6
5
4
3
2
1

DRIVE END

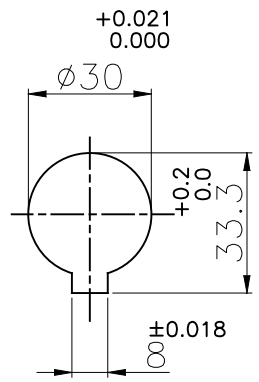

DRIVEN END

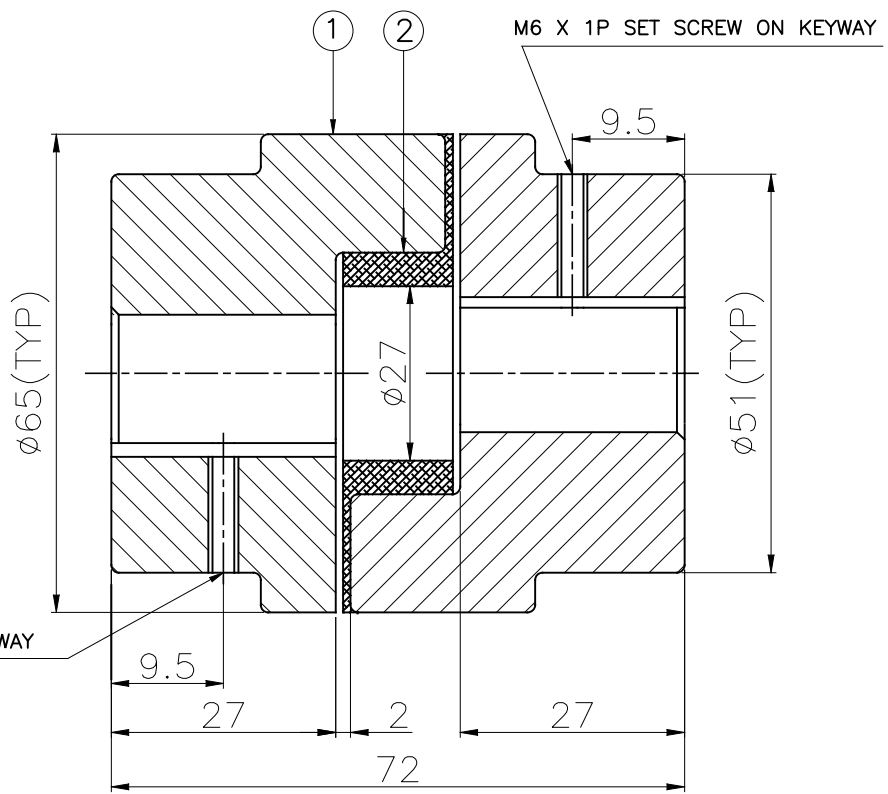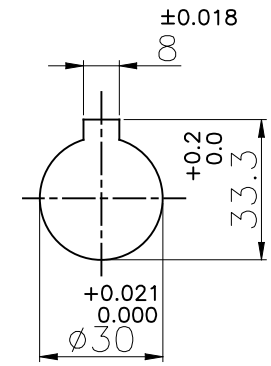

APPLICATION DETAILS

APPLICATION	-
RATED POWER	- KW
RATED SPEED	- RPM
RATED TORQUE	- Nm
A.S.F.	-

COUPLING SPECIFICATIONS

COUPLING RATING	0.49 KW AT 100 RPM
RATED TORQUE	46.40 Nm
MAX. BORE	30 mm
WEIGHT (Approx.)	0.75 Kg
INERTIA (WK ²)	2.88X10 ⁻⁵ Kgm ²

CPLG HUBS DYNAMICALLY BALANCED TO GR.6.3 AS PER ISO 1940- I.

MAX. MISALIGNMENTS

AXIAL DEFLECTION	±1 mm
ANGULAR DEFLECTION	1°
RADIAL DEFLECTION	0.4 mm

SR NO	DESCRIPTION	MATERIAL	QTY.
2	SPIDER	NITRILE RUBBER	1
1	HUB	CI IS 210 GR FG 260	2

REV.	DMRN NO.	DESCRIPTION	REV. BY	DATE	TITLE: L-99/----- CPLG	MATERIAL: REFER TABLE	AUTHORITY	INITIALS	SIGN	DATE
					CUSTOMER NAME: -		DRAWN	-	-	-
							CHECKED	-	-	-
							APPROVED	-	-	-
							SCALE:NTS	REF. No.:		
										DRG. No.:
										-----/-

RATHI RATHI TRANSPOWER PVT LTD PUNE 411014

This drawing / information / design is the property of Rathi Transpower Pvt. Ltd. It is confidential & must not be made public or copied without prior written authorization & is subjected to recall at any time. Acceptance of this drawing constitutes full agreement with these conditions