


IF IN DOUBT, PLEASE ASK

DO NOT SCALE! ALL DIMENSIONS ARE IN mm

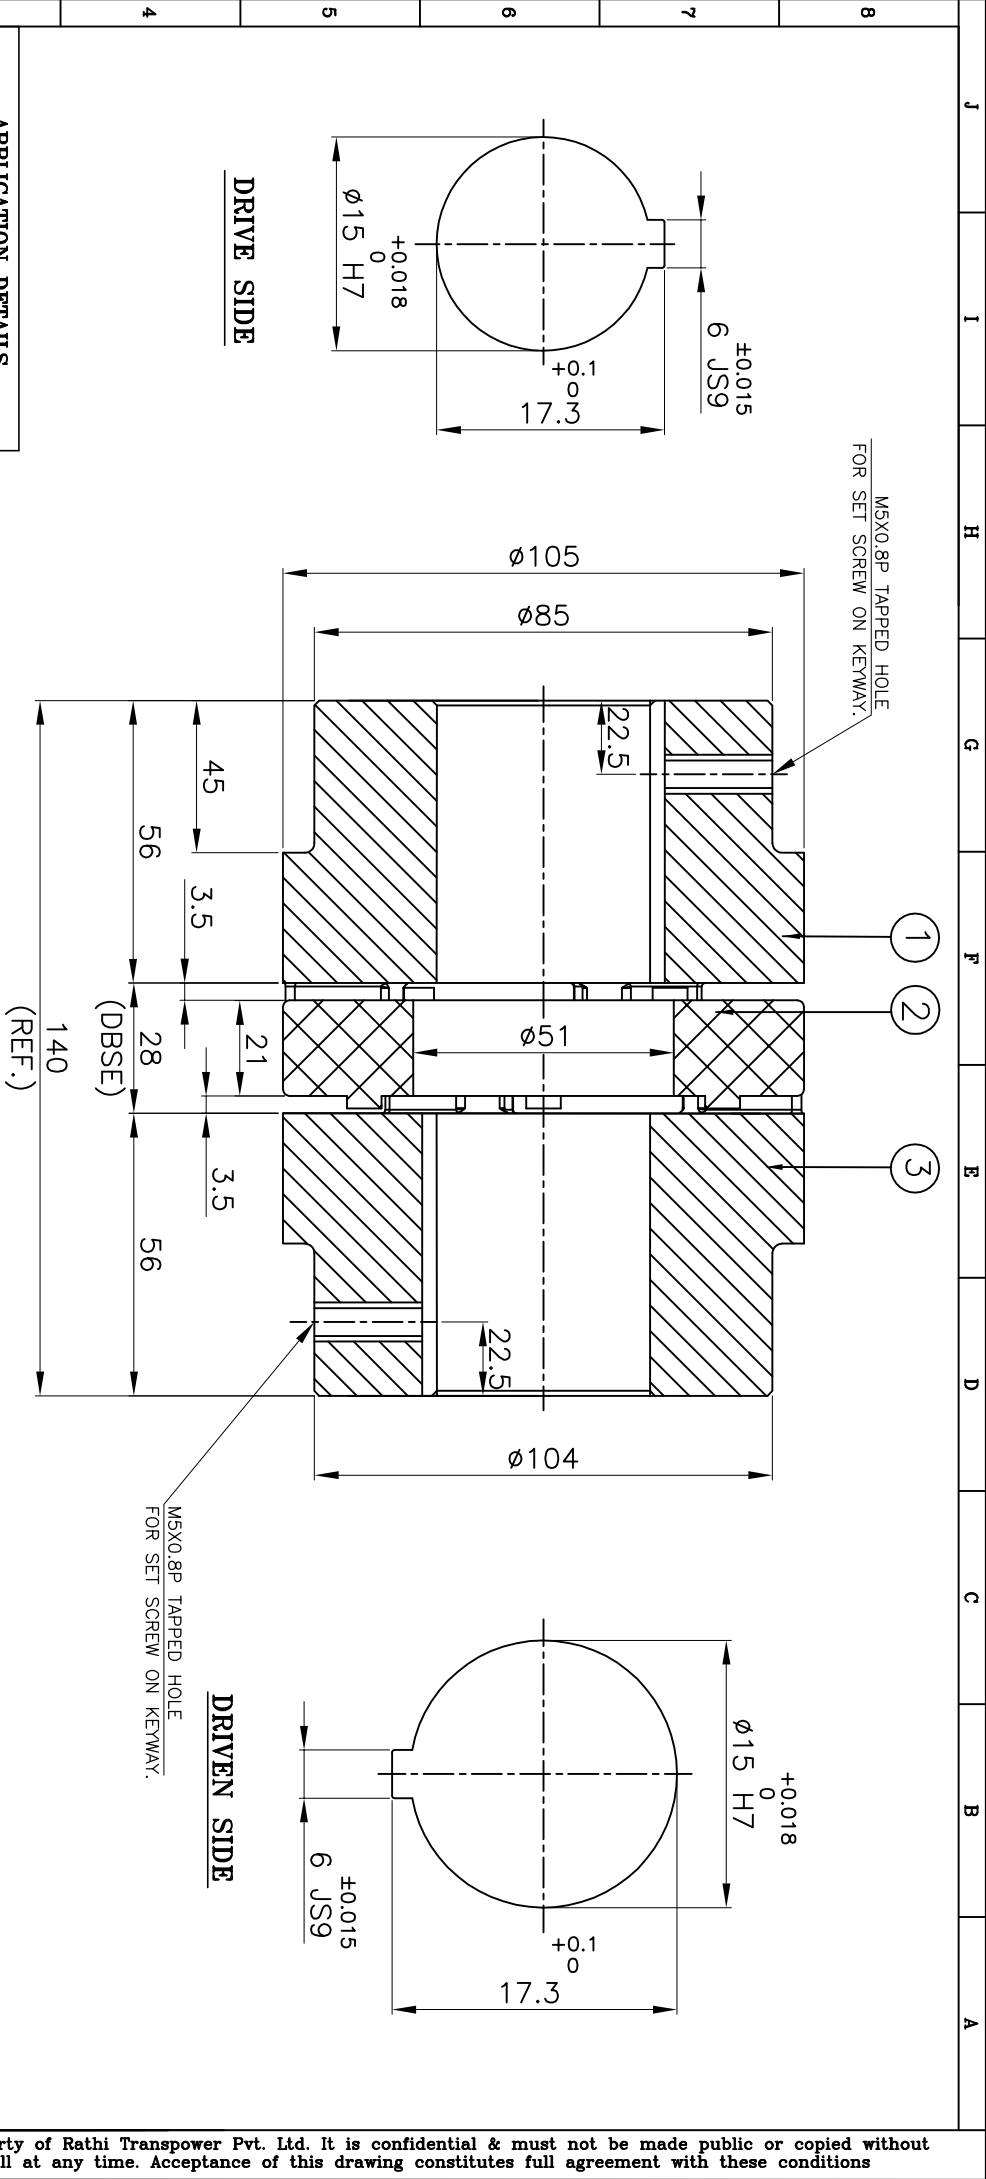

APPLICATION DETAILS

APPLICATION	-
RATED POWER	- KW
RATED SPEED	- RPM.
RATED TORQUE	- Nm
A.S.F.	-

COUPLING CAPACITY

COUPLING RATING	6.98KW AT 100RPM.
RATED TORQUE	667Nm
MAX. BORE TYPE-I & II	52 & 62mm
WEIGHT (APPROX)	5.2kg
INERTIA (WK ²)	9.6X10 ⁻³ kg-m ²

MAX. MISALIGNMENT

AXIAL	±3.0mm
ANGULAR	1°
PARALLEL	0.35mm

SERIAL NO.	DESCRIPTION	MATERIAL	QTY.
3	HUB-II	C.I. IS:210 FG 260	1
2	SPIDER	POLYURETHANE (LIGHT WORN)	1
1	HUB-I	C.I. IS:210 FG 260	1

TITLE:	RRJ-48 I/II /-----
CUSTOMER NAME:	CPLG.
MATERIAL:	REFER TABLE
AUTHORITY INITIALS:	DRAWN
SIGN:	CHECKED
DATE:	APPROVED
SCALE:	N/S REF. No.:

REV. DMRN NO.	DESCRIPTION	REV. BY	APPD. BY	DATE



RATHI TRANSPOWER PVT LTD
PUNE 411014

DRG No.: -----
3 EN-F-112

This drawing / information / design is the property of Rathi Transpower Pvt. Ltd. It is confidential & must not be made public or copied without prior written authorization & is subjected to recall at any time. Acceptance of this drawing constitutes full agreement with these conditions