


J	I	H	G	F	E	D	C	B	A
ERP CODE: _____									
DRIVE SIDE									
M5 SET SCREW ON KEYWAY.									

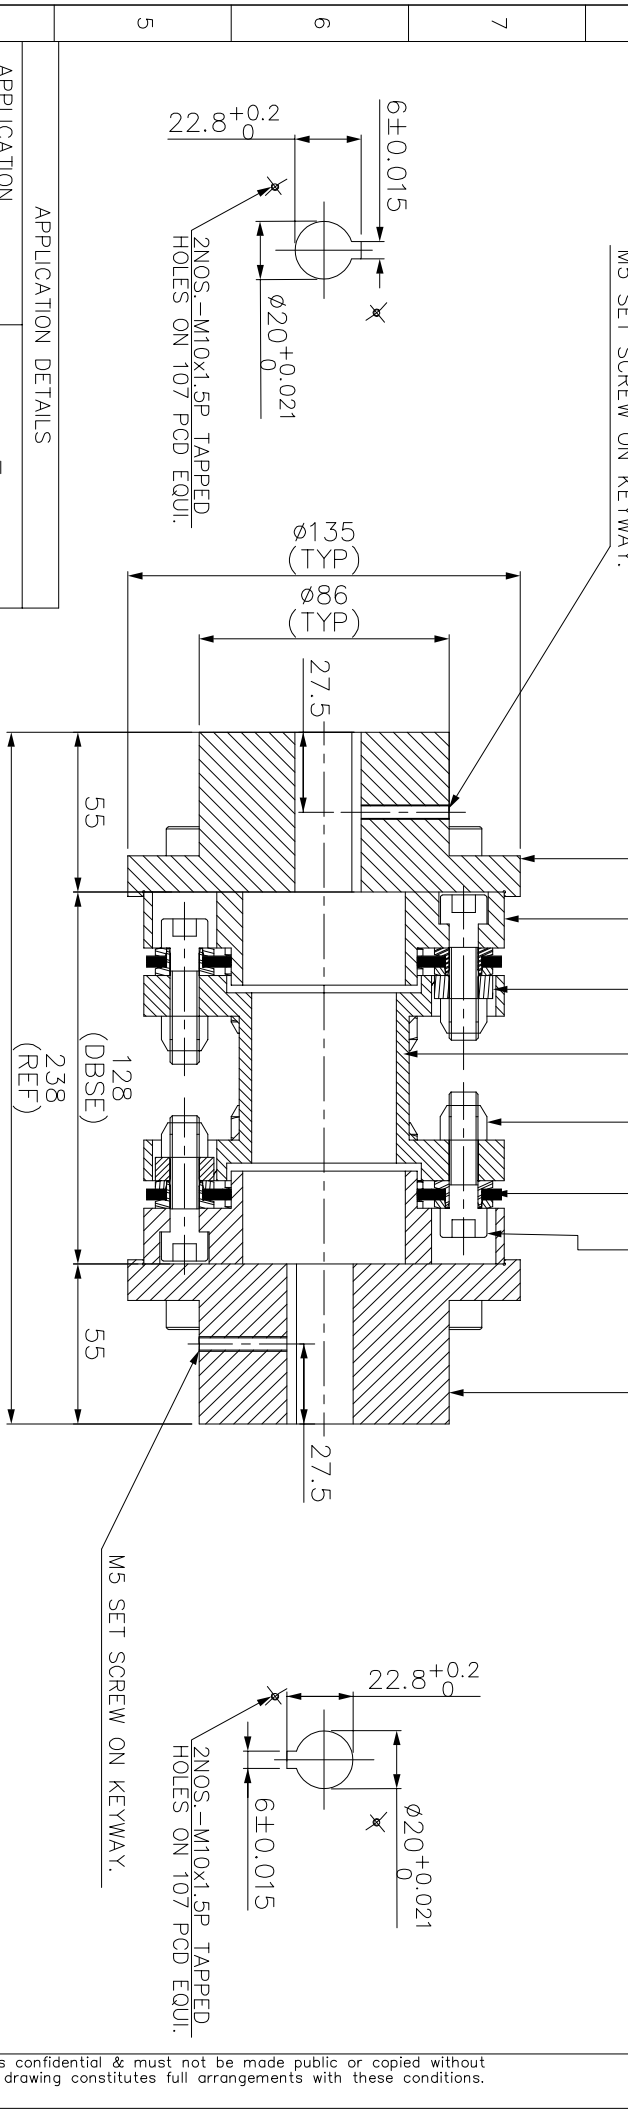

APPLICATION DETAILS	
APPLICATION	-
RATED POWER	-
RATED SPEED	-
RATED TORQUE	-
A.S.F.	-
COUPLING SPECIFICATIONS	
COUPLING RATING	12.6 KW @ 100 RPM
RATED TORQUE	1203 Nm
MAX. BORE	65 mm
WEIGHT (Approx.)	12.264 kg
INERTIA (WK ²)	0.023 kg.M ²
TORSIONAL STIFFNESS	0.232 MNm/rod
CPLG DYNAMIC BALANCING TO GR 6.3 AS PER ISO 21940-11	
MAX. MISALIGNMENT	
AXIAL DEFLECTION	±1 mm
ANGULAR DEFLECTION	0.75°
RADIAL MISALIGNMENT	0.013 mm

NOTE:-					
TIGHTENING TORQUE :-					
1)	SR.NO.8 COUPLING BOLT =	59Nm			
2)	SR.NO.7 ATTACHMENT BOLT =	59Nm			
REV	DMRN NO.	DESCRIPTION	REV. BY	APPD. BY	DATE

TITLE: REM-125(128)/1 /XXXX CPLG		MATERIAL: REFER TABLE	
CUSTOMER NAME: _____		AUTHORITY INITIALS: _____	
RATHI TRANSPower PVT LTD PUNE-411014		SIGN: _____	
DATE: _____		DATE: _____	
SCALE: NTS		REF. NO. _____	
MFG. OR REOL. _____		L/REM-XXXX/0	

SR.NO.	DESCRIPTION	MATERIAL	QTY.
9	CLEVELOCK NUT	GR.10	12
8	COUPLING BOLT	AH GR. 12.9	12
7	ATTACHMENT BOLT(I)	AH GR. 12.9	12
6	S SLEEVE	ASTM A 1040	6
5	ELEMENT BLADE ASSEMBLY	AISI SS 301	2
4	SPACER	ASTM A106B,ASTM A36 \ ASTM A1040	1
3	ADAPTER I/II	ASTM A 1040	2
2	DRIVEN HUB (I)	ASTM A 1040	1
1	DRIVE HUB (I)	ASTM A 1040	1