
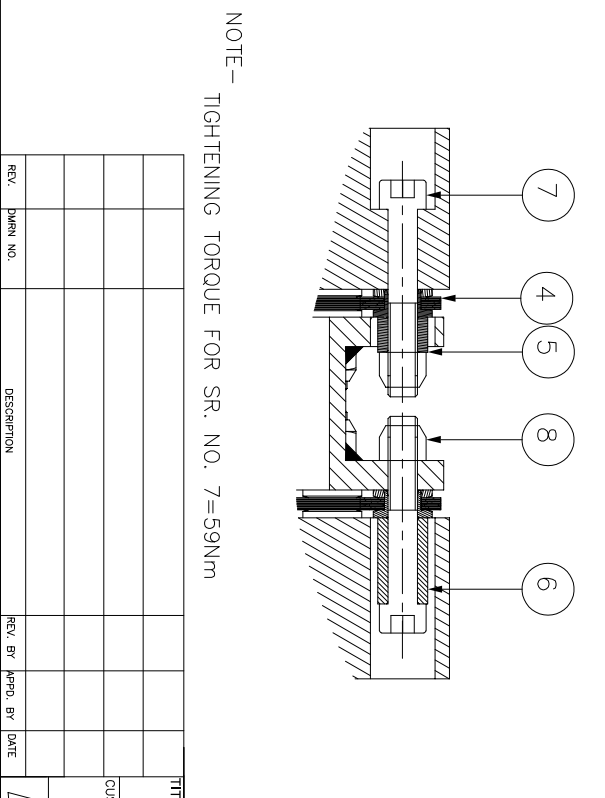
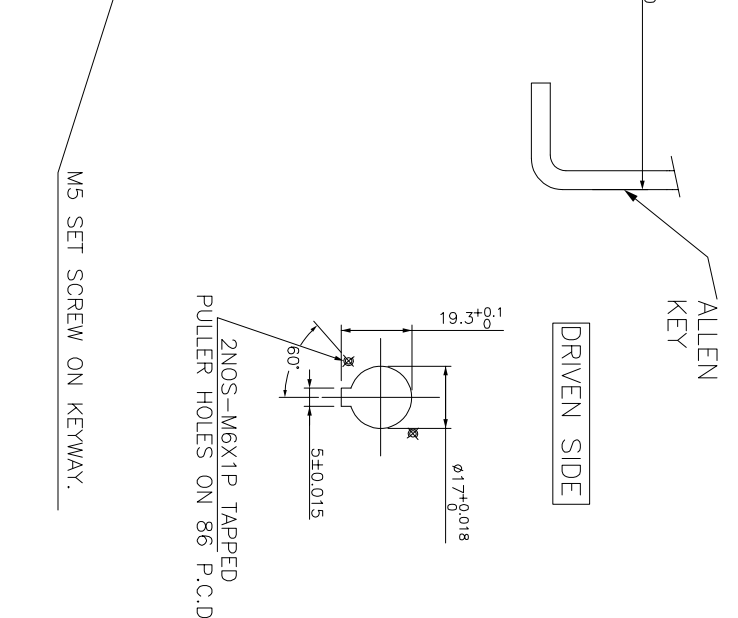


IF IN DOUBT, PLEASE ASK

DO NOT SCALE

ALL DIMENSIONS ARE IN mm

J	I	H	G	F	E	D	C	B	A
ERP CODE: _____									
M5 SET SCREW ON KEYWAY.									
APPLICATION DETAILS									
APPLICATION - -									
RATED POWER - -									
RATED SPEED - -									
RATED TORQUE - -									
A.S.F. - -									
COUPLING SPECIFICATIONS									
COUPLING RATING 12.6 KW @ 100 RPM									
RATED TORQUE 1203 Nm									
PEAK TORQUE 2408 Nm									
SHORT CIRCUIT TORQUE 4214 Nm									
MAX. BORE 70 mm									
WEIGHT (Approx.) 12.356 kg									
INERTIA (WK ²) 0.025 kg.M ²									
CPLG DYNAMIC BALANCED TO GR 6.3 AS PER ISO 21940-11									
MAX. MISALIGNMENT									
AXIAL DEFLECTION ±1 mm									
ANGULAR DEFLECTION 0.75° PER STACK									
RADIAL MISALIGNMENT 0.013mm									

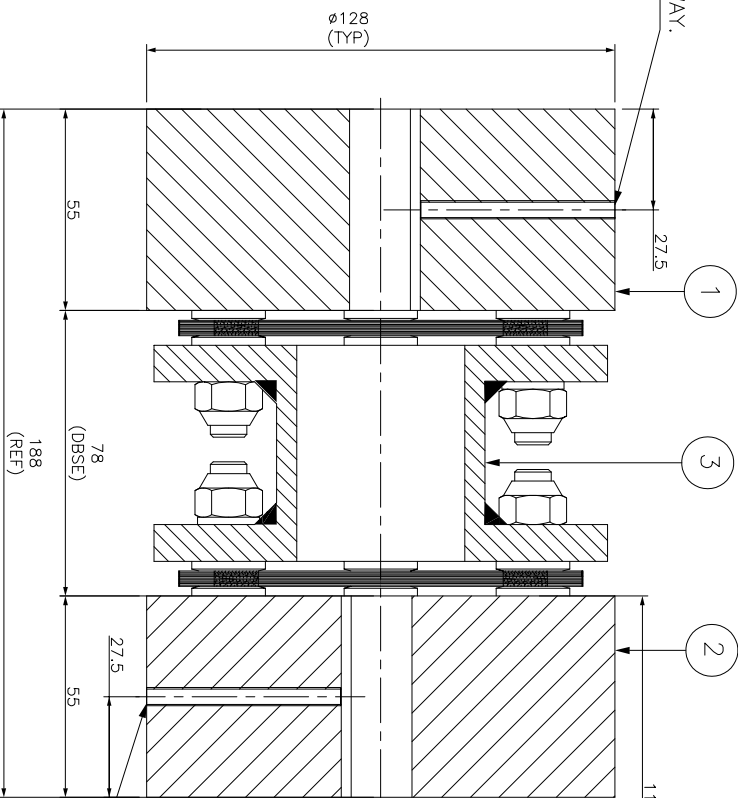

9	CLEV LOCK NUT	GR. 10	12
7	COUPLING BOLT (I)	AH GR. 12.9	12
6	SLEEVE (I)	ASTM A 1040	6
5	SLEEVE (I)	ASTM A 1040	6
4	ELEMENT BLADE ASSEMBLY	AI SI SS 301	2
3	SPACER	ASTM A36, ASTM A106B \ ASTM A1040	1
2	DRIVEN HUB (I)	ASTM A 1040	1
1	DRIVE HUB (I)	ASTM A 1040	1

TITLE: RLM-170(78) II/II/-----
 COUPLING REFER TABLE

CUSTOMER NAME: _____

SCALE: NTS REF. No.: _____

APPROVED: _____

SCALE: NTS REF. No.: _____

APPROVED: _____

SCALE: NTS REF. No.: _____

APPROVED: _____

REV. DMRN NO. DESCRIPTION REV. BY APPD. BY DATE

RATHI TRANSPOWER PVT LTD PUNE 411014

SCALE: NTS REF. No.: _____

APPROVED: _____

SCALE: NTS REF. No.: _____

APPROVED: _____

SCALE: NTS REF. No.: _____

APPROVED: _____

This drawing/ information/ design is the property of Rathi Transpower Pvt. Ltd. It is confidential & must not be made public or copied without prior written authorization & is subjected to recall at any time. Acceptance of this drawing constitutes full arrangements with these conditions.