IF IN DOUBT, PLEASE ASK | DO NOT SCALE | ALL DIMENSIONS ARE IN mm

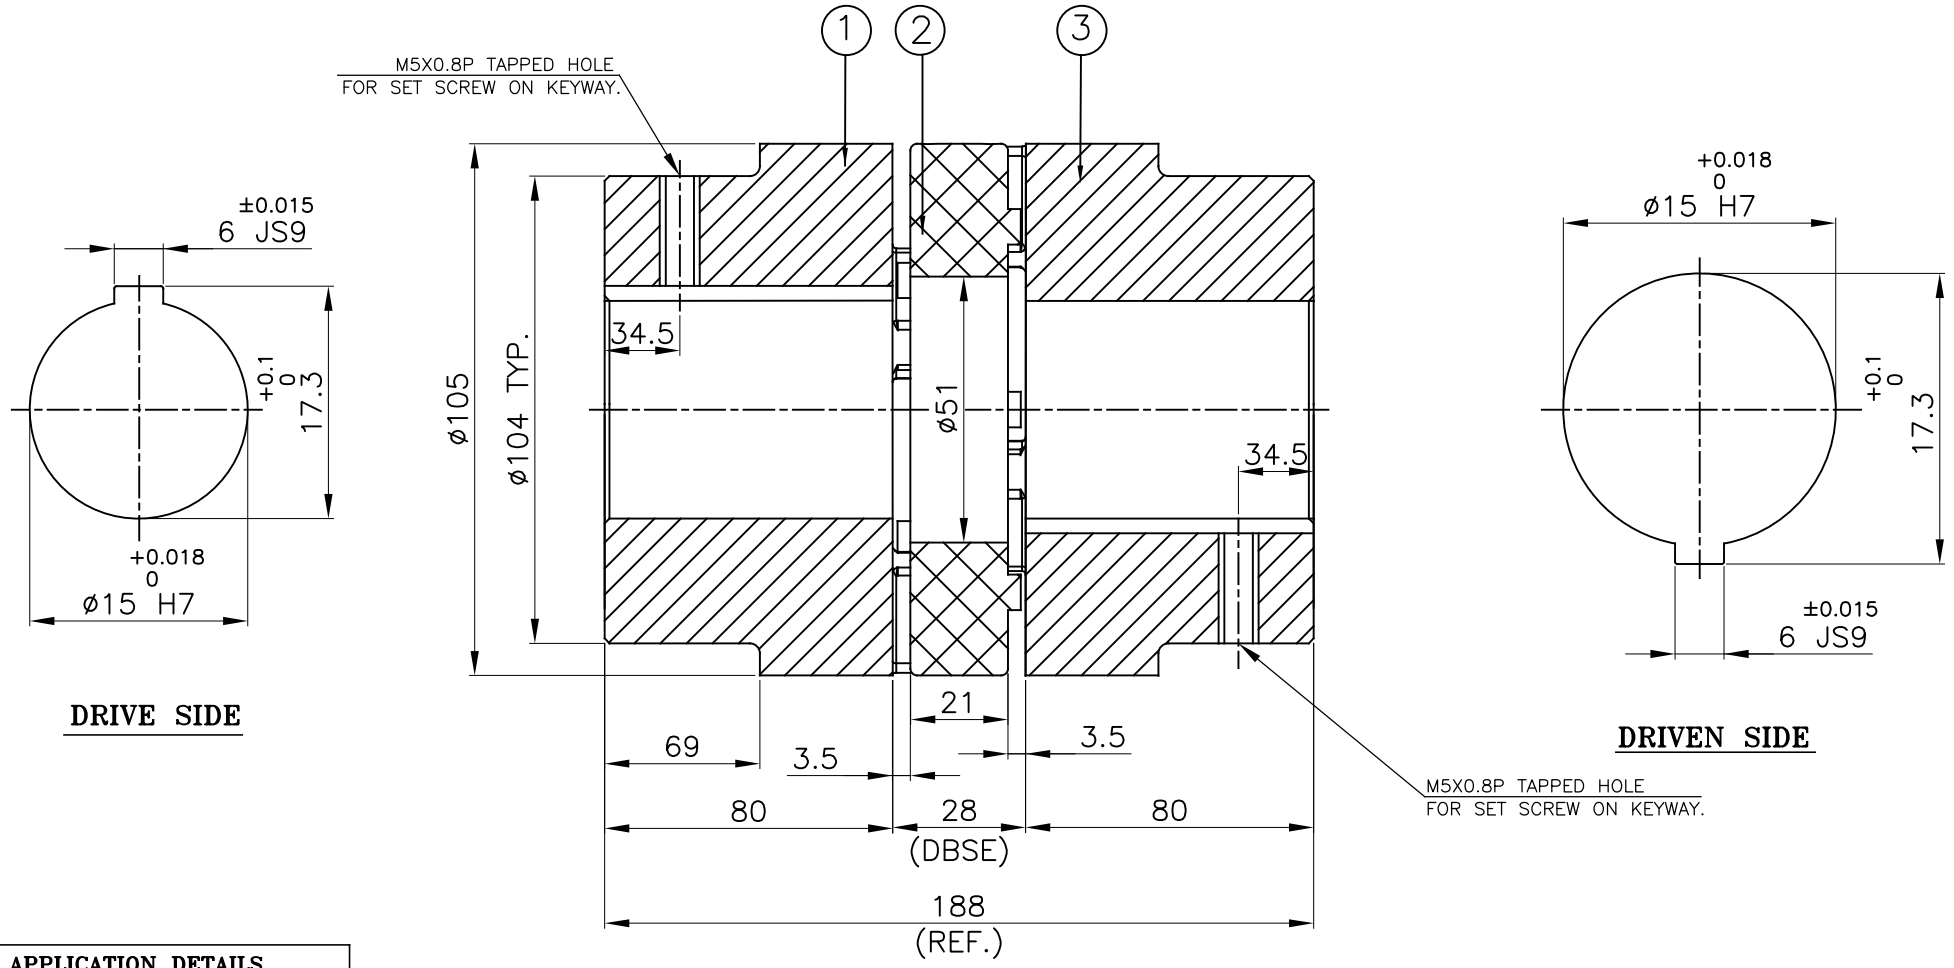

DRIVE SIDE

DRIVEN SIDE

APPLICATION DETAILS	
APPLICATION	–
RATED POWER	– KW
RATED SPEED	– RPM.
RATED TORQUE	– Nm
A.S.F.	–
COUPLING CAPACITY	
COUPLING RATING	5.49KW AT 100RPM.
RATED TORQUE	525Nm
MAX. BORE TYPE–III	62mm
WEIGHT (APPROX)	4.2kg
INERTIA (WK^2)	$13.4X10^{-3}$ kg–m^2
MAX. MISALIGNMENT	
AXIAL	±3.0mm
ANGULAR	1°
PARALLE	0.35mm

SR NO	DESCRIPTION	MATERIAL	QTY.
3	HUB–III	C.I. IS:210 FG 260	1
2	SPIDER	POLYURETHANE (BLUE)	1
1	HUB–III	C.I. IS:210 FG 260	1

REV.	DMRN NO.	DESCRIPTION	REV. BY	APPD. BY	DATE

TITLE: RRJ–48 III/III /---- CPLG.

MATERIAL: REFER TABLE

AUTHORITY	INITIALS	SIGN	DATE
DRAWN	–		–
CHECKED	–		–
APPROVED	–		–

CUSTOMER NAME: -

SCALE: NTS | REF. No.:

Lovejoy INDIA

RATHI TRANSPOWER PVT LTD
PUNE 411006

DRG. No.: -----/-

This drawing / information / design is the property of Rathi Transpower Pvt. Ltd. It is confidential & must not be made public or copied without prior written authorization & is subjected to recall at any time. Acceptance of this drawing constitutes full agreement with these conditions

– 0/

3 EN–F–112