


J I H G F E D C B A

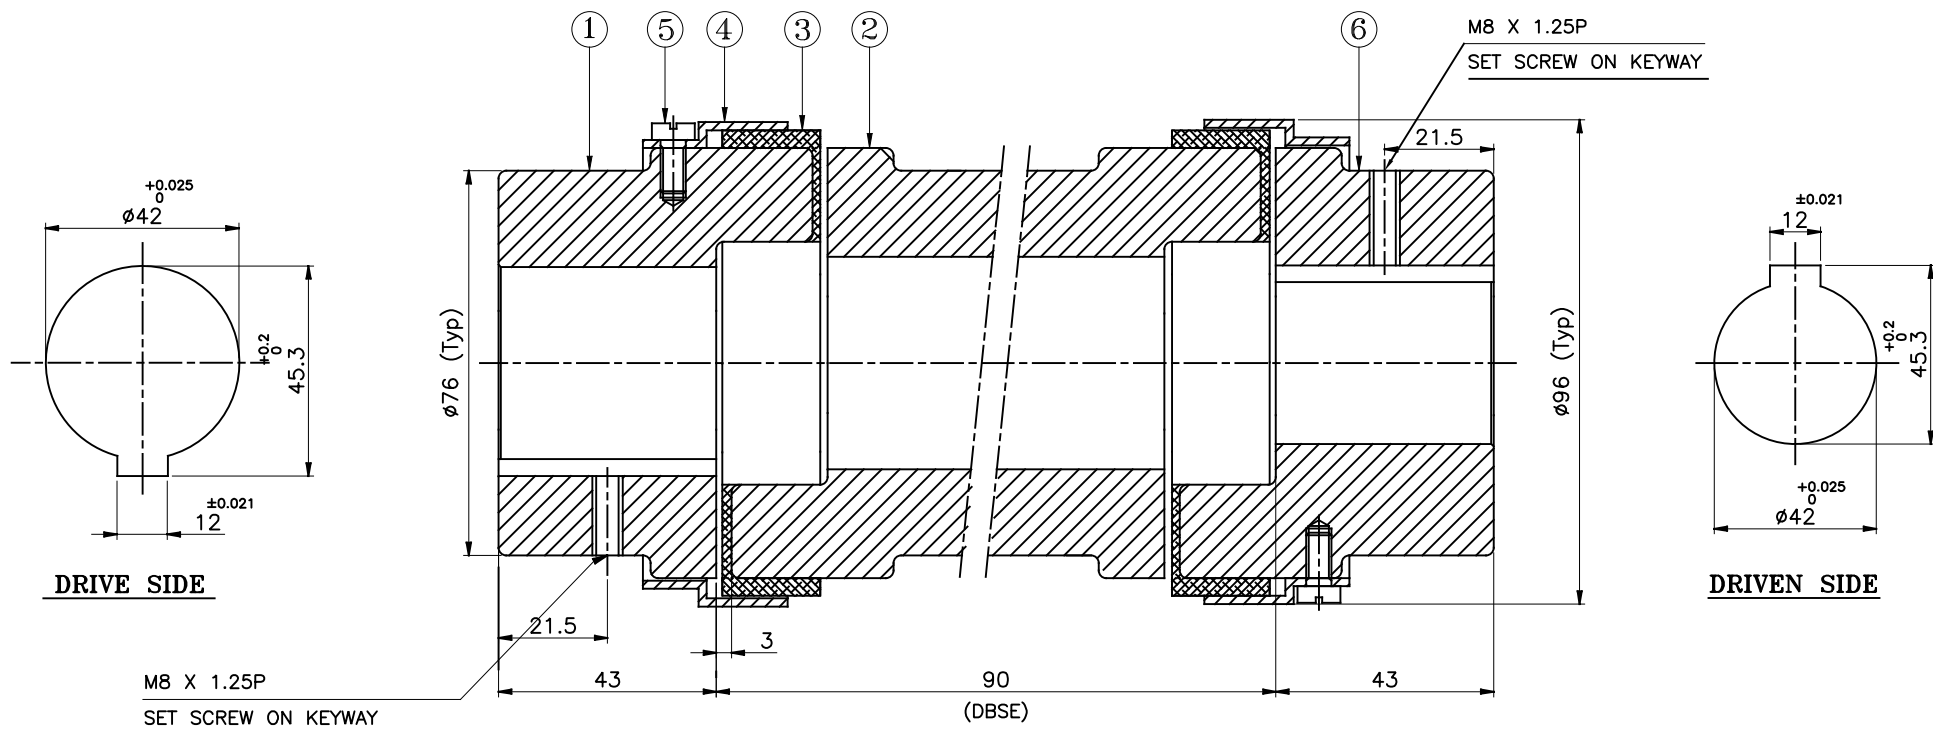

| APPLICATION DETAILS | |
|--|-------------------------|
| APPLICATION | - |
| RATED POWER | - KW |
| RATED SPEED | - RPM |
| RATED TORQUE | - kNm |
| A.S.F | - |
| COUPLING SPECIFICATIONS | |
| COUPLING RATING | 2.3 KW AT 100 RPM. |
| RATED TORQUE | 222.5 Nm |
| MAX. BORE | 42 mm. |
| WEIGHT (Approx.) | 3.93 Kg |
| INERTIA WK ² | 0.0038 Kgm ² |
| COUPLING HUBS DYNAMICALLY BALANCED TO GR6.3 AS PER ISO 1940-1. | |
| MAX. MISALIGNMENTS | |
| AXIAL DEFLECTION | ±1.5 mm |
| ANGULAR DEFLECTION | 1° |
| RADIAL DEFLECTION | 0.4mm |

| ITEM NO. | DESCRIPTION | MATERIAL | QTY. |
|----------|-------------------|-------------------------|------|
| 6 | HUB DRIVEN SIDE | C.I. I.S. 210 GR.FG 260 | 1 |
| 5 | CHEESE HEAD SCREW | STAINLESS STEEL | 6 |
| 4 | OUTSIDE RING | C.R.C.A | 2 |
| 3 | SNAP WRAP | H-Trans | 2 |
| 2 | SPACER | ALUMINIUM | 1 |
| 1 | HUB DRIVE SIDE | C.I. I.S. 210 GR.FG 260 | 1 |

| REV. | DMRN NO. | DESCRIPTION | REV. BY | APPD. BY | DATE |
|------|----------|-------------|---------|----------|------|
| | | | | | |
| | | | | | |
| | | | | | |

TITLE: **RRS-110 (90)/-CPLG.** MATERIAL: **REFER TABLE**

CUSTOMER NAME: -

SCALE: NTS REF. No.: -

Lovejoy RATHI TRANSPOWER PVT LTD PUNE 411014 DRG. No.: -/-

This drawing / information / design is the property of Rathi Transpower Pvt. Ltd. It is confidential & must not be made public or copied without prior written authorization & is subjected to recall at any time. Acceptance of this drawing constitutes full agreement with these conditions